# PRECISION DRONE OPS

## Stockpile Cut / Fill Volumetric Summary - Sample Report

Project: Natrona County Subdivision - Grading Area A | Casper, WY
Survey Date: October 2026 | Method: RTK UAV Photogrammetry TIN Differential

### VOLUMETRIC SUMMARY (BASE PLANE METHOD)

Toe-Line Base Elevation: 5,122.50 ft


Boundary Area: 4.85 Acres (211,266 sq ft)

**Gross Cut Volume: 14,820 cu yd**

**Gross Fill Volume: 2,150 cu yd**

**NET CUT (SURPLUS): 12,670 cu yd**

Bulking Factor Applied: 1.15 (+1,900 cu yd)

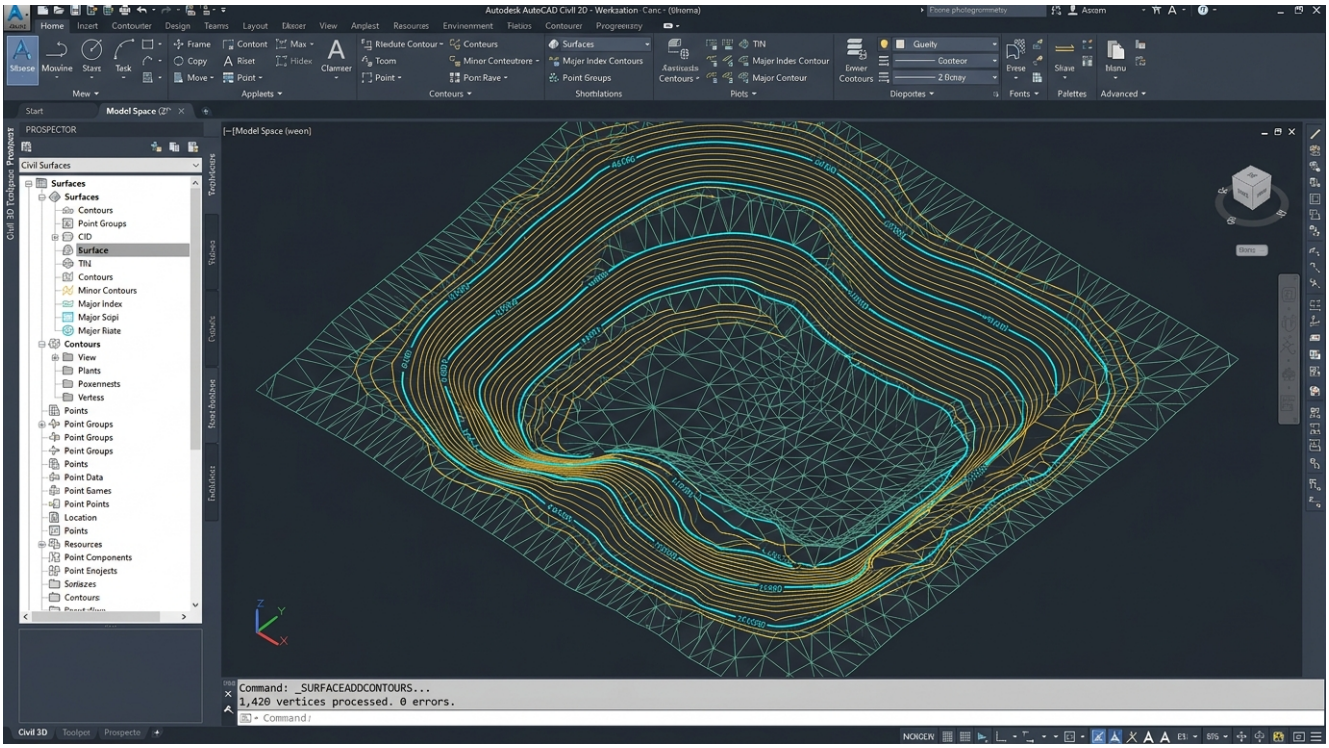


**SAMPLE EVALUATION REPORT - NOT A STAMPED LEGAL PROPERTY SURVEY**

Precision Drone Ops supplies technical dataset outputs for spatial visualization and earthwork estimation.

Contact: kelton.hawkes85@precision-droneops.net | (307) 253-9400 | Casper, WY